

AD-A035 140

NAVAL RESEARCH LAB WASHINGTON D C  
AN IMPROVED ALGORITHM FOR ADAPTIVE PROCESSING, (U)  
DEC 76 F F KRETSCHMER, B L LEWIS  
NRL-8084

F/G 17/9

UNCLASSIFIED

NL

1 OF 1  
AD-A  
035140



END  
DATE  
FILMED  
3-11-77  
NTIS

U.S. DEPARTMENT OF COMMERCE  
National Technical Information Service

AD-A035 140

AN IMPROVED ALGORITHM FOR ADAPTIVE PROCESSING

NAVAL RESEARCH LABORATORY, WASHINGTON, D. C.

17 DECEMBER 1976

ADA035140

NRL Report 8084

# An Improved Algorithm for Adaptive Processing

FRANK F. KRETSCHMER, JR., AND BERNARD L. LEWIS

*Target Characteristics Branch  
Radar Division*

December 17, 1976



REPRODUCED BY  
NATIONAL TECHNICAL  
INFORMATION SERVICE  
U. S. DEPARTMENT OF COMMERCE  
SPRINGFIELD, VA. 22161

NAVAL RESEARCH LABORATORY  
Washington, D.C.



Approved for public release: distribution unlimited.

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Report 8084	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)  AN IMPROVED ALGORITHM FOR ADAPTIVE PROCESSING		5. TYPE OF REPORT & PERIOD COVERED Interim report on a continuing NRL problem
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s)  Frank F. Kretschmer, Jr., and Bernard L. Lewis		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS  Naval Research Laboratory Washington, D.C. 20375		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS  NRL Problem R12-07 SF-12-141-41B, 62712N
11. CONTROLLING OFFICE NAME AND ADDRESS  Naval Sea Systems Command Washington, D.C. 20362		12. REPORT DATE December 17, 1976
		13. NUMBER OF PAGES 13
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report)  Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)  Adaptive processing Radar Sidelobe cancelers ECCM		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  The Widrow LMS algorithm based on the method of steepest descent tends toward instability. An improved algorithm is given which is unconditionally stable and provides better cancelation performance in adaptive-array or adaptive-filter applications.		

DDC  
 REPRODUCED  
 FEB 1 1977  
 REGISTRY

DD FORM 1473 1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE  
S/N 0102-014-6601

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

## CONTENTS

INTRODUCTION .....	1
DISCUSSION .....	1
STABILITY CONSIDERATIONS .....	3
SIMULATION OF RANDOM INPUTS .....	6
SUMMARY .....	9
REFERENCES .....	10

ACCESSION for	
WWS	White Section <input checked="" type="checkbox"/>
DDC	Self Section <input type="checkbox"/>
UNANNOUNCED	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODES	
Dist.	Avail. and/or SPECIAL
A	

Preceding page blank

# AN IMPROVED ALGORITHM FOR ADAPTIVE PROCESSING

## INTRODUCTION

A discrete form of a least-mean-square (LMS) algorithm based on the method of steepest descent was given by Widrow et al. [1] as a means of determining the weight vectors for minimizing interference entering an adaptive array. Their algorithm becomes unstable for fast adaptation, and this report will show that a modification to their algorithm provides unconditional stability and better performance even for slow adaptation.

## DISCUSSION

The steepest-descent algorithm was given in Ref. 1 as

$$W(j+1) = W(j) - 2k_s E(j) X(j), \quad (1)$$

where  $W(j+1)$  is the weight vector to be used on the  $(j+1)$ th input data sample,  $X(j)$  is the  $j$ th input data sample,  $k_s$  is a scalar constant, and  $E(j)$  is the error signal developed on the  $j$ th data sample and is given by

$$E(j) = d(j) - W^T(j) X(j),$$

in which  $d(j)$  is the  $j$ th sample of the desired signal and  $W^T$  is the transpose of  $W$ .

In general  $X(j)$  and  $W(j)$  are multidimensional vector quantities. A form of this equation is given in Ref. 2 for the case of an Applebaum-Howells implementation as

$$W_i(j+1) = W_i(j) \left(1 - \frac{1}{\tau}\right) + \left(\frac{G}{\tau}\right) E(j) V_i^*(j), \quad (2)$$

where  $\tau$  is the filter smoothing constant,  $G$  is the gain term,  $V_i(j)$  is the input from the  $i$ th array element, with  $V_i^*$  being the conjugate of  $V_i$ , and

$$E(j) = P(j) - \sum_{i=1}^N W_i(j) V_i(j),$$

in which  $P(j)$  is the pilot signal.

To simplify the analysis, we consider the special case of a single adaptive loop in a sidelobe-canceler configuration [3] as shown in Fig. 1. In Fig. 1 the main input is obtained from a radar antenna and the auxiliary input is obtained from an omnidirectional antenna whose gain is normally greater than the sidelobe level of the radar antenna. Without loss in generality the pilot signal is taken as the main input, since the adaptation



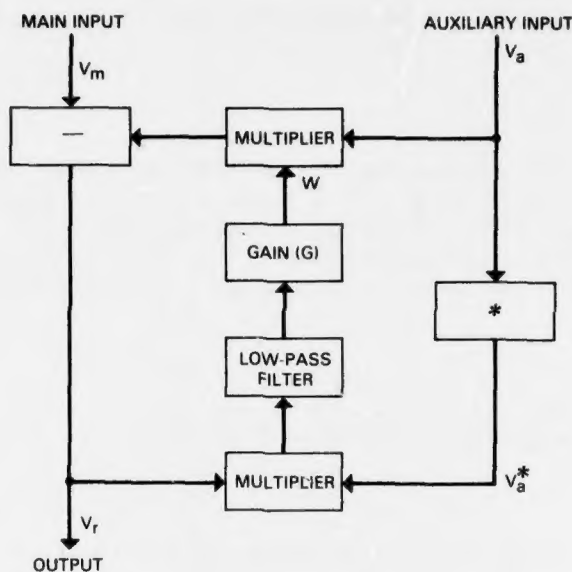


Fig. 1 — A basic sidelobe-canceler loop

criterion (LMS) is unchanged. The single sidelobe canceler corresponds to Fig. 8 in Ref. 1, with the error signal defined as

$$E(t) = V_r(t) = V_m(t) - W(t) V_a(t),$$

where  $V_r(t)$  is the residue signal,  $V_m(t)$  is the radar-channel signal, which is taken as the desired signal response in Ref. 1,  $W(t)$  is a weight signal,  $V_a(t)$  is the auxiliary-channel signal, and all functions correspond to complex modulation functions. The sidelobe-canceler interpretation is also discussed in Ref. 4. From (2) the adaptation algorithm for the sidelobe canceler becomes

$$W(j+1) = KW(j) + G(1-K) E(j) V_a^*(j), \quad (3a)$$

with

$$E(j) = V_m(j) - W(j) V_a(j), \quad (3b)$$

where

$$K = 1 - \frac{1}{\tau} = 1 - 2\pi f_{3dB},$$

in which  $f_{3dB}$  is the integrating-filter 3-dB bandwidth normalized to the sampling frequency  $f_s$ .

From (3a) it is seen that the next weight  $W(j + 1)$  is derived in terms of the present weight and present value of  $E(j) V_a^*(j)$ . The weight  $W(j + 1)$  is then used with the next auxiliary signal input to determine the residue. For fast loops,  $W(j + 1)$  derived from the present data is not the proper weight for the new input data. The effect is to introduce a phase shift, not present in actual loops, which causes loop instability. To avoid this instability and to provide better cancellation performance and more realistic loop simulation, a preferred algorithm is

$$W(j) = KW(j - 1) + G(1 - K) E(j) V_a^*(j), \quad (4a)$$

with

$$E(j) = V_m(j) - W(j) V_a(j). \quad (4b)$$

In this algorithm the weight applied to  $V_a(j)$  is derived in terms of present input values. In effect the weight is taken prior to the delay in Fig. 7 of Ref. 1 rather than after it. Thus the weight is proper for the current data input rather than for the input data one sample interval earlier.

#### STABILITY CONSIDERATIONS

The steepest-descent algorithm given by (3) is

$$W(j + 1) = KW(j) + G(1 - K) [V_m(j) - W(j) V_a(j)] V_a^*(j). \quad (5)$$

For a step input with  $V_a(j)$  equal to a constant and also equal to  $V_m(j)$  so that the signals are perfectly correlated, (5) may be written as

$$W(j + 1) = W(j) (K - A) + A, \quad (6)$$

where

$$A = G(1 - K) |V_a(j)|^2.$$

Letting  $W(1)$  equal 0, it is found from several iterations of (6) that the general term is

$$W(N) = \frac{A (1 - x^{N-1})}{1 - x}, \quad (7)$$

where

$$x = K - G(1 - K) |V_a|^2.$$

For stability it is required that  $|x| < 1$  or

$$|G(1 - K) |V_a|^2 - K| < 1. \quad (8)$$



Substituting the value

$$K = 1 - \frac{1}{\tau} = 1 - 2\pi f_{3dB}$$

in (8) leads to

$$(1 + G) |V_a|^2 \pi f_{3dB} < 1. \quad (9)$$

Also, the weight will not ring in amplitude for  $A$  less than unity.

A stability condition derived for the sidelobe canceler version of (1) is found to be

$$|1 + 2k_s |V_a|^2| < 1,$$

which agrees with the stability condition given by equation (27) in Ref. 1, with  $|V_a|^2$  in our case being equal to the unique eigenvalue.

Computer simulations were run to demonstrate the instability associated with use of (3) and are shown in Figs. 2a and 2b. In these simulations  $G$  equals 100 and  $|V_a|^2$  equals 2. From (9) the stability condition for the specified values of  $G$  and  $|V_a|^2$  is

$$f_{3dB} < 0.00158. \quad (10)$$

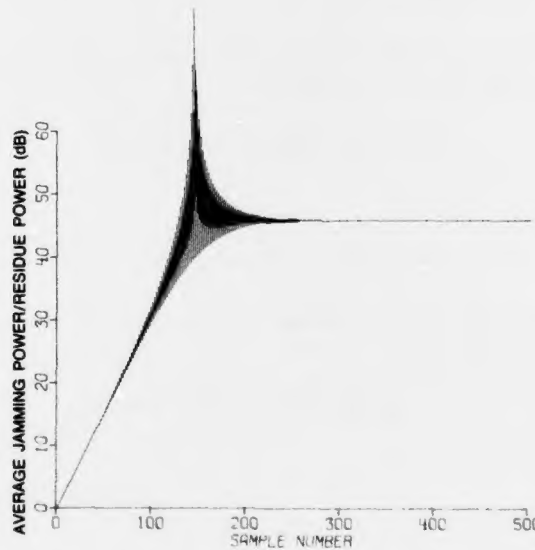


Fig. 2a — Response of the steepest-descent algorithm when  $f_{3dB} = 0.00155$

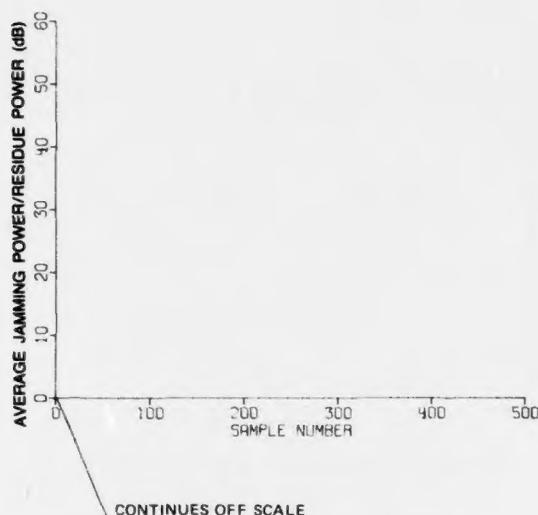


Fig. 2b — Response of the steepest-descent algorithm when  $f_{3dB} = 0.00162$

Figure 2a shows a damped oscillation occurring for  $f_{3dB}$  equal to 0.00155, and Fig. 2b shows instability occurring for  $f_{3dB}$  equal to 0.00162, with the weight phase alternating between 0 and 180 degrees and the weight magnitude growing unbounded.

For the improved algorithm the general weight term of (4) for a step input of constant value and  $V_m$  equal to  $V_a$  may be shown to be

$$W(N) = \frac{C(1 - D^N)}{1 - D}, \quad (11)$$

where

$$C = \frac{K}{1 + A}$$

and

$$D = \frac{A}{1 + A}.$$

Since  $D$  is less than unity,  $W(N)$  is unconditionally stable. In Fig. 3 the response to a step input is plotted using the improved algorithm for the same value of  $f_{3dB}$  (0.00162) which caused unstable operation of the steepest-descent algorithm (Fig. 2b). There is no overshoot or ringing in Fig. 3, since the response is unconditionally stable.

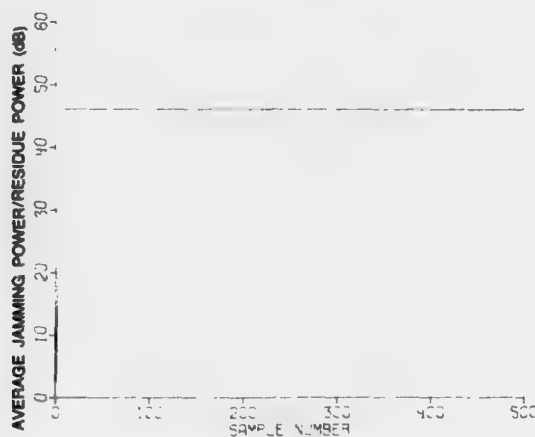


Fig. 3 — Response of the improved algorithm  
when  $f_{3dB} = 0.00162$

### SIMULATION OF RANDOM INPUTS

Computer simulations were run using independent samples of a Gaussian random process having a mean of 0 and a variance equal to 2. Successive samples were correlated by taking a sliding-window average of two samples and renormalizing so that the resultant power remained equal to 2. The same samples were then applied to the main and auxiliary channels of the sidelobe canceler. The steepest-descent algorithm and the improved algorithm were compared for an input step of random values which were the same for each simulation. In these simulations a constant target signal was introduced in the radar channel at sample number 250 at a clutter-to-signal level of 20 dB.

The steepest-descent and improved algorithms are shown in Figs. 4a and 4b for  $f_{3dB}$  equal to 0.00025, which corresponds to an effective loop bandwidth ( $B_E$ ) to jammer bandwidth ( $B_J$ ) ratio of 0.1.  $B_E$  is defined as

$$B_E = (1 + G|V_a|^2) f_{3dB}.$$

Comparison of Figs. 4a and 4b shows that the steepest-descent algorithm gives more points of lower cancellation (under the 40-dB line for example) than the improved algorithm gives. This is attributed to the ringing in the steepest-descent algorithm which is present even for the slower loop adaptation. Ringing will occur, as previously mentioned, when  $A$  of (7) is greater than 1. Thus use of the relation

$$A = G(1 - K)|V_a(j)|^2 < 1$$

and of the loop parameters  $G = 100$  and  $f_{3dB} = 0.00025$  leads to the requirement for ringing that

$$|V_a(j)| > 2.52.$$

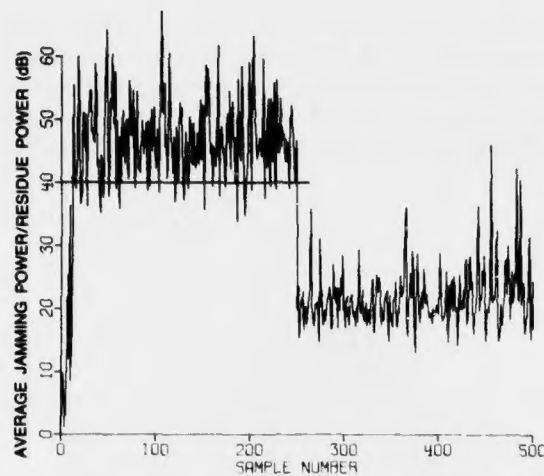


Fig. 4a — Response of the steepest-descent algorithm when  $f_{3dB} = 0.00025$

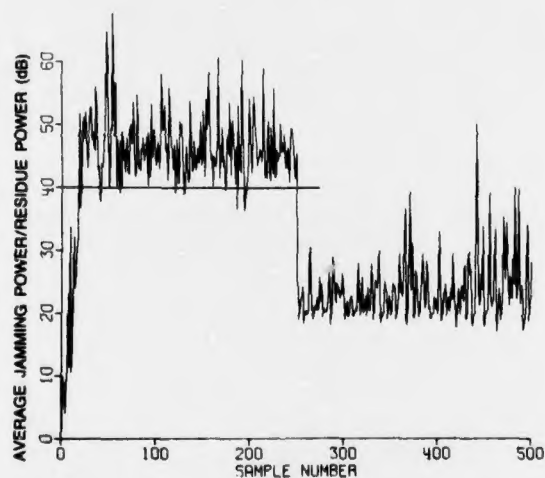


Fig. 4b — Response of the improved algorithm when  $f_{3dB} = 0.00025$

Since  $V_a(j)$  is a Gaussian random variable with a mean of 0 and a variance equal to 2,  $|V_a(j)|$  is Rayleigh and the probability of  $|V_a(j)|$  being greater than 2.52 is

$$P_R(|V_a(j)| > 2.52) = e^{-(2.52^2)/4} = 0.20.$$

Hence there is a 20% probability of causing ringing in this slow-loop simulation. The result of this ringing is to cause degraded cancellation of jamming signals which is due strictly to the algorithm.

In Figs. 5a and 5b the steepest-descent and improved algorithm results are shown for  $f_{3dB} = 0.00124$ , or correspondingly  $B_E/B_J = 0.5$ , and poor performance is seen to result for the steepest-descent algorithm whereas good performance is obtained with the improved algorithm. For the case of  $f_{3dB} = 0.0025$ , or  $B_E/B_J = 1$ , the steepest-descent algorithm gives unstable loop performance and (Fig. 6) the improved algorithm gives stable performance.

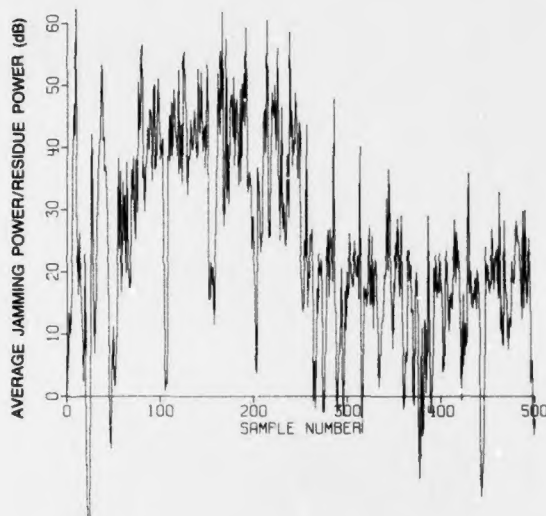


Fig. 5a — Response of the steepest-descent algorithm when  $f_{3dB} = 0.00124$

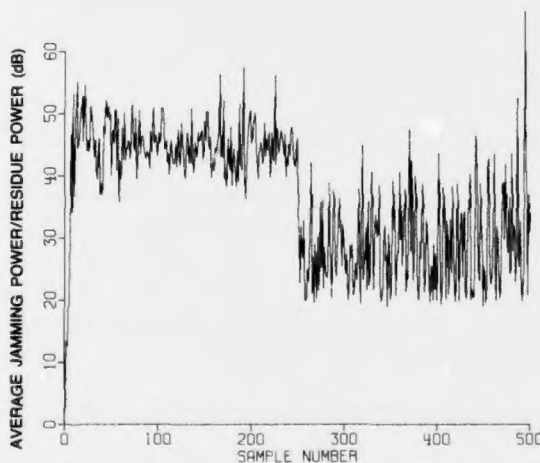


Fig. 5b — Response of the improved algorithm when  $f_{3dB} = 0.00124$

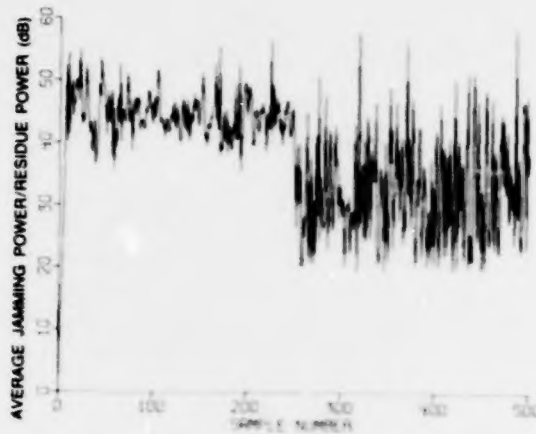


Fig. 6 — Response of the improved algorithm  
when  $f_{dB} = 0.0025$

### SUMMARY

A comparison of algorithms was shown for a single loop in a sidelobe-canceler application as an illustration. The concept generalizes to any adaptive processing which minimizes the mean-square error. The generalization of (4) for  $M$  multiple loops is given for the  $i$ th weight by

$$W_i(j) = KW_i(j-1) + G(1-K) E(j) V_i^*(j), \quad (12a)$$

with

$$E(j) = V_m(j) - \sum_{n=1}^M W_n(j) V_n(j). \quad (12b)$$

A simplified version of this algorithm is given by

$$W_i(j) = KW_i(j-1) + G(1-K) E(j) V_i^*(j), \quad (13a)$$

with

$$E(j) = V_m(j) - W_i(j) V_i(j) - \sum_{\substack{n=1 \\ n \neq i}}^M W_n(j-1) V_n(j). \quad (13b)$$

In this simplified algorithm each weight is found in a closed-loop fashion, as in the single-loop case, while the other weights are frozen. The actual residue signal resulting from this algorithm is then taken to be



$$E(j) = V_m(j) - \sum_{n=1}^M w_n(j) V_n(j),$$

where the weights are derived as just explained.

In conclusion it has been shown that the improved algorithm is unconditionally stable and provides better performance than the LMS algorithm based on the method of steepest descent. The steepest-descent algorithm was shown to cause a degradation in cancellation performance due to its tendency to ring when driven by random noise even for loop parameters which are slow on the average. Also, the improved algorithm provides a more accurate means of simulating actual adaptive-loop performance.

#### REFERENCES

1. B. Widrow, P.E. Mantey, L.J. Griffiths, and B.B. Goode, "Adaptive Antenna Systems," *Proc IEEE* 55, 2143-2159 (Dec. 1967).
2. I.S. Reed, J.D. Mallett, and L.E. Brennan, "Rapid Convergence Rate in Adaptive arrays," *IEEE Trans. on Aerospace and Electronic Systems AES-10* (No. 6), 853-863 (Nov. 1974).
3. F.F. Kretschmer, "Effects of Cascading Sidelobe Canceller Loops," *Record of IEEE 1975 International Radar Conference*, pp. 181-185.
4. B. Widrow, et al., "Adaptive Noise Cancelling: Principles and Applications," *Proc IEEE* 63, 1692-1716 (Dec 1975).